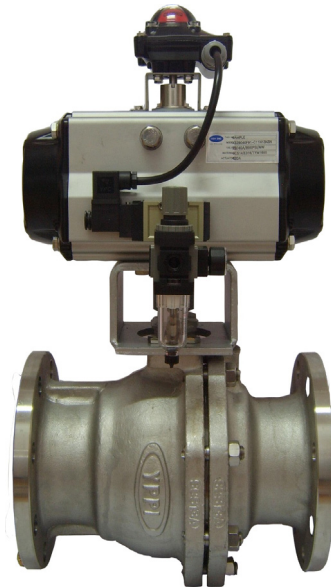
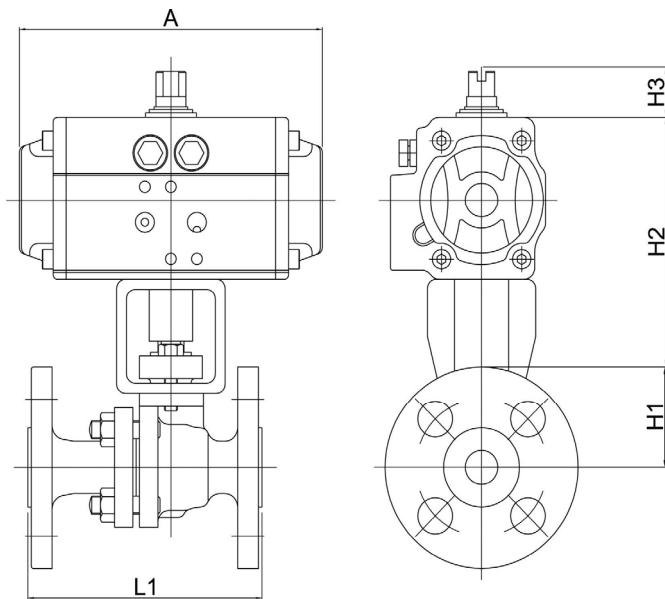


2-WAY BALL VALVE (FLANGED)**KS2B-1****KOREA SPECIAL VALVE ENG**

경제적인 밸브 선정을 위해 최선을 다하겠습니다

**STANDARD SPECIFICATIONS**

Model No	KS2B00010-C00000000 (Model Selection Guide Reference)		
Series	Full Port		
Fluids	Water, Steam, Gas(Air), Oil, Cemical Process, etc.		
Valve Size	1/2"(15A)~10"(250A), Other,		
Max.Pressure	JIS 10K/20K, ANSI 150Lb/300Lb, DIN PN16~PN25, Other,		
Connections	Flanged, Welded, Other,		
Materials	Body	Carbon Steel, Stainless Steel, Alloy Steel, Other,	
	*Pllug	Stainless Steel, Alloy Steel,A276 304/316HF,(A351)	Other
	Seat	PTFE, RTFE, TFM1600, PEEK,A276 304/316HF,	Other
Temperatures		Soft Seat(-45°C~180°C)	Metal Seat(-45°C~450°C) Other
Seat Leakages	* ANSI B16.104, No Leakage		* ANSI B16.104(IV), Other
Operators	* Pneumatic, Electric, Manual, Other,		
Options	* V-port(15°, 30°, 60°), Steam jacket, Fire safe design, Other		

DIMENSIONES

*아래 치수는 참고치수로 실물과 차이가 있을수 있습니다

SIZE		L1		H1	H2	H3	A	ACTUATOR
MM	INCH	10K(150Lb)	20K(300Lb)					
15A	1/2"	108	140	80	72	APL210(123)	144	KS50DA
20A	3/4"	117	152	92	88	APL310(177)	163	KS63DA
25A	1"	127	165	110	100	APL410(204)	202	KS66DA
32A	1-1/4"	140	178	113	109	APL510(151)	202	KS66DA
40A	1-1/2"	165	190	121	117		210	KS75DA
50A	2"	178	216	130			247	KS88DA
65A	2-1/2"	190	241	166	133		268	KS100DA
80A	3"	203	283	184	155		316	KS115DA
100A	4"	229	305	248	172		347	KS125DA
125A	5"	356					414	KS145DA
150A	6"	394					467	KS160DA
200A	8"	457					555	KS200DA
250A	10"	533						KSHD200D